

IMAGE 1

SOLAR SIGN
FLOOD LIGHT



■ MAIN FEATURES



IP Rating: 65

Engineered to withstand diverse weather conditions for longevity and consistent performance.



WATERPROOF

For any weather condition



WIRELESS

LDUSK TO DAWN



Long Battery Life

UP TO 3 NIGHTS

SOLAR ADVERTISING FLOOD LIGHTS

■
©LONG AUTONOMY WITH COEUS TECHNOLOGY

TECHNICAL SPECIFICATIONS

Model : SSL-02 (Solar sign flood light)	
Solar panel	
High Efficiency Solar Panel	4W (PET laminated)
Led	
LED Qty	100pcs SMD2835
LED Module	1
LED Wattage	4W
Efficiency	160lm/w
LED illumination color	6000-6500K (Other CCT can be customized)
Battery	
Lithum Battery	3.7V 5200mAh
Charging Time	6-8hrs by bright sunshine
General Information	
Product Material	High end quality PC+ABS
Product Size	350mm*92mm*54mm
IP Level	65
Operation Temperature	-25 ° C ~ 65 ° C
Working mode	Steady light entire night , auto off at daytime for charging
Light control threshold	30lux
Sensitivity Method	N/A
Lighting time	6 nights after fully charged (COEUS Technology)
Mounting Methods	1. Rotatable bracket mounting 2. Rotatable extension arm mounting 3. Ground stake mounting
Certificate	CE ROHS FCC ISO9001:2015 Patent No.: 2020308088089
Warranty	1 year
Applications	Small sign light , billboard light , real estate sign light , fence post light , post light . door number lighting .

** commercial signs*

Mounting Options

✓ Rotatable
Extension Arm



✓ Rotatable
Bracket



✓ Ground
Stake



Mounting Options

MAIN FEATURES




Product Advantages


- High quality ABS material
- Three installation methods
- Large capacity battery 5200mAh
- COEUS technology
- High-brightness led chips



PET LAMINATED HIGH EFFICIENCY SOLAR PANEL

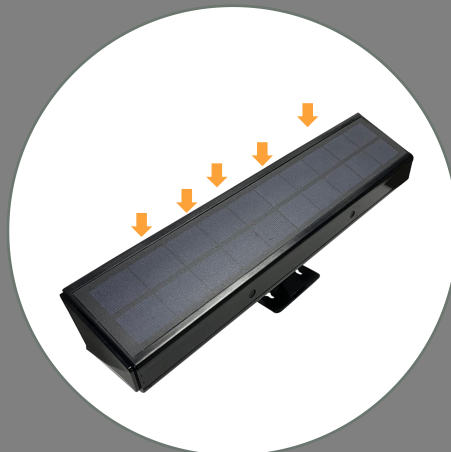

Application Pictures

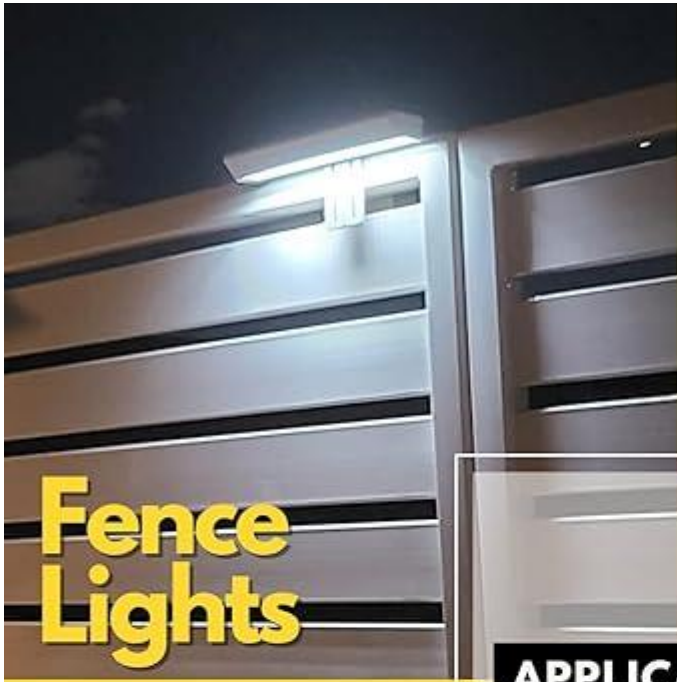


**Fence
Lights**




**Address
Lights**

APPLICATION

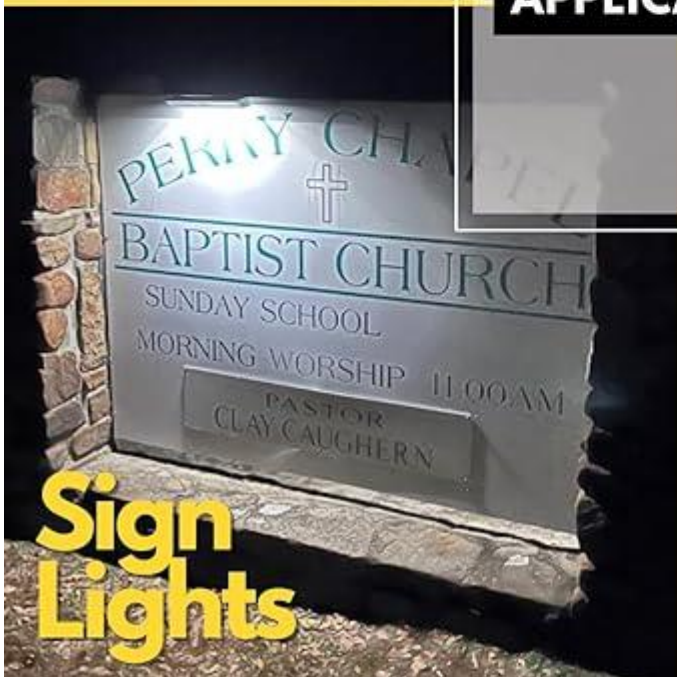

**Sign
Lights**

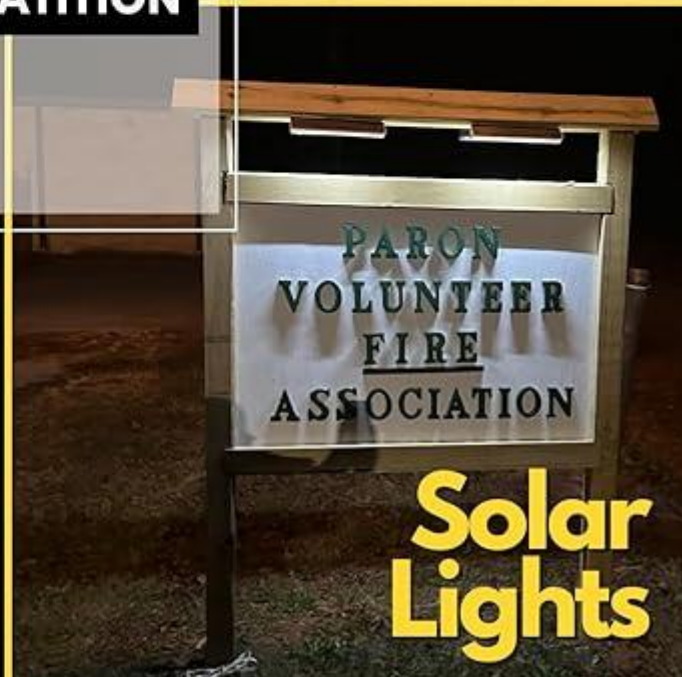

**Solar
Lights**